




# BEARING MANUFACTURING DE MEXICO, S.A.D...

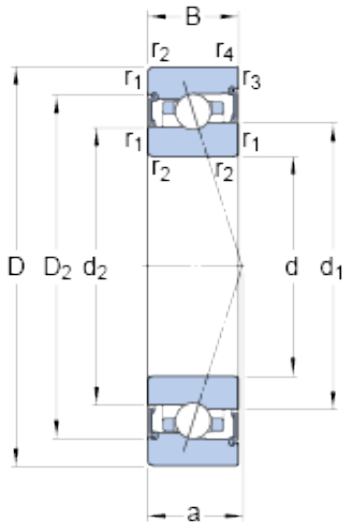

## 90 mm x 125 mm x 18 mm SKF S71918 ACB/P4A angular contact ball bearings

Bearing No. S71918 ACB/P4A

S71918 ACB/P4A Bearing 2D drawings and 3D CAD models

Size	125x90x18 mm
Bore Diameter	125 mm
Outer Diameter	90 mm
Width	18 mm
d	90 mm
D	125 mm
B	18 mm
d <sub>1</sub>	103 mm
d <sub>2</sub>	101.4 mm
D <sub>2</sub>	115 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
a	39 mm
d <sub>a</sub> - min.	96 mm
d <sub>a</sub> - max.	102.3 mm
d <sub>b</sub> - min.	96 mm
d <sub>b</sub> - max.	100.7 mm
D <sub>a</sub> - max.	119 mm
D <sub>b</sub> - max.	121.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	16.8 kN
Basic static load rating - C <sub>0</sub>	16.6 kN
Fatigue load limit - P <sub>u</sub>	0.68 kN



## BEARING MANUFACTURING DE MEXICO,S.A.D...

Limiting speed for grease lubrication	12000 r/min
Ball - $D_w$	7.144 mm
Ball - z	36
Calculation factor - e	0.68
Calculation factor - $Y_2$	0.87
Calculation factor - $Y_0$	0.38
Calculation factor - $X_2$	0.41
Calculation factor - $Y_1$	0.92
Calculation factor - $Y_2$	1.41
Calculation factor - $Y_0$	0.76
Calculation factor - $X_2$	0.67
Preload class A - $G_A$	100 N
Preload class B - $G_B$	200 N
Preload class C - $G_C$	600 N
Calculation factor - f	1.12
Calculation factor - $f_1$	0.99
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.02
Calculation factor - $f_{2C}$	1.07
Calculation factor - $f_{HC}$	1
Preload class A	139 N/micron
Preload class B	178 N/micron
Preload class C	270 N/micron
$d_1$	103 mm
$d_2$	101.4 mm
$D_2$	115 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	96 mm



## BEARING MANUFACTURING DE MEXICO, S.A.D...

$d_a$ max.	102.3 mm
$d_b$ min.	96 mm
$d_b$ max.	100.7 mm
$D_a$ max.	119 mm
$D_b$ max.	121.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	22.5 kN
Basic static load rating $C_0$	26.5 kN
Fatigue load limit $P_u$	0.68 kN
Attainable speed for grease lubrication	12000 r/min
Ball diameter $D_w$	7.144 mm
Number of balls z	36
Preload class A $G_A$	100 N
Static axial stiffness, preload class A	139 N/ $\mu$ m
Preload class B $G_B$	200 N
Static axial stiffness, preload class B	178 N/ $\mu$ m
Preload class C $G_C$	600 N
Static axial stiffness, preload class C	270 N/ $\mu$ m
Calculation factor f	1.12
Calculation factor $f_1$	0.99
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.02
Calculation factor $f_{2C}$	1.07
Calculation factor $f_{HC}$	1
Calculation factor e	0.68
Calculation factor (single, tandem) $Y_2$	0.87
Calculation factor (single, tandem) $Y_0$	0.38



## BEARING MANUFACTURING DE MEXICO,S.A.D...

Calculation factor (single, tandem) $X_2$	0.41
Calculation factor (back-to-back, face-to-face) $Y_1$	0.92
Calculation factor (back-to-back, face-to-face) $Y_2$	1.41
Calculation factor (back-to-back, face-to-face) $Y_0$	0.76
Calculation factor (back-to-back, face-to-face) $X_2$	0.67
Mass bearing	0.61 kg